

# UTILITY PATENT APPLICATION TRANSMITTAL

11/15/99  
JCS45 U.S. PTO

11/15/99  
JCS45 U.S. PTO  
09/43942

Address to: <b>Box PATENT APPLICATION Assistant Commissioner for Patents Washington, DC 20231</b>	Attorney Docket No.	RPC 0491 PUS
	Inventor(s) or Application Identifier:  WILLIAM P. APPS; JEFF WILKERSON; and BRIAN MUSSER	

1. This application entitled PLASTIC PALLET is:
- a.     A new application under 37 C.F.R. §1.53(b).
- b.   X   A   X   continuation     divisional or     continuation-in-part application under 37 C.F.R. § 1.53(b) of prior application Serial No. 09/004,389 filed on January 8, 1998 entitled PLASTIC PALLET.

Application elements and other attached papers:

2.   X   Specification (incl. Claims and Abstract) [Total Pages 13]
3.   X   Drawings (    informal   X   formal) [Total Sheets 18]
4.   X   Oath or Declaration
- a.     Newly-executed
- b.   X   Copy from a prior application (37 C.F.R. § 1.63(d))
5.   X   Incorporation By Reference: The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Item 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6.     This application is filed by fewer than all the inventors named in the prior application, 37 C.F.R. § 1.53(d)(4).
- a.     **DELETE** the following inventor(s) named in the prior nonprovisional application:  
\_\_\_\_\_  
\_\_\_\_\_
- b.     The inventor(s) to be deleted are set forth on a separate sheet attached hereto.

## CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this UTILITY PATENT APPLICATION TRANSMITTAL and the documents referred to as attached therein are being deposited on the below date with the United States Postal Service in an envelope as "Express Mail Post Office to Addressee" addressed to: Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

Express

Mail Label No. EL 450 454 950 US

Date of Deposit: November 15, 1999

Konstantine J. Diamond

(Type or print name of person mailing paper)

Kam J. Diamond  
(Signature of person mailing paper)

## 7. Preliminary Amendment:

- a. ☒ A Preliminary Amendment is attached.
- b. ☒ Cancel in this application original claims 21 of the prior application before calculating the filing fee.
- c. ☐ Please amend the specification by inserting before the first line the sentence:
- "This is a
- ☐ continuation
- ☐ divisional
- of copending application(s)
- ☐ Serial number\_ / \_\_\_\_\_ filed on \_\_\_\_\_."
- d. ☐ A Petition to Suspend Prosecution For The Time Necessary to File An Amendment (New Application Filed Concurrently) is attached.

## 8. Small entity status:

- a. ☐ A small entity statement is attached.
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer desired.

## 9. Fee Calculation:

FOR	NUMBER FILED	NUMBER EXTRA	RATE	CALCULATIONS
TOTAL CLAIMS (37 C.F.R. § 1.16(c))	20    -20 =		X 18.00	0.00
INDEPENDENT CLAIMS (37 C.F.R. § 1.16(b))	2        -3 =		X 78.00	0.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 C.F.R. §1.16(d))			260.00	0.00
			BASIC FEE (37 C.F.R. § 1.16(a))	760.00
Total of above Calculations =				760.00
Reduction by 50% for filing by small entity (Note 37 C.F.R. §§ 1.9, 1.27, 1.28)				
Assignment Recordal Fee			40.00	
TOTAL =				760.00

10. ☒ A check in the amount of \$ 760.00 is enclosed.
11. ☒ The Commissioner is hereby authorized to credit overpayments or charge the following fees (or any deficiency therein) to Deposit Account No. 02-3978:
- a. ☒ Fees required under 37 C.F.R. § 1.16.
- b. ☒ Fees required under 37 C.F.R. § 1.17.

12. Maintenance of Copendency of Prior Application

☐ A request for extension of time and the appropriate fee have been filed in the pending **prior** application (or are being filed in the prior application concurrently herewith) to extend the period for response until \_\_\_\_\_.

13. ☐ An Information Disclosure Statement (IDS) is attached, along with the following indicated attachments thereto:

a. ☐ Form PTO/SB/08 (\_\_\_\_\_ sheet(s))

b. ☐ Copies of references cited

14. ☐ Certified copy of priority document(s)

15. ☒ Return Receipt Postcard

16. ☐ Other: \_\_\_\_\_

17. ☒ An Assignment of the invention to REHRIG-PACIFIC COMPANY, INC.

a. ☐ is attached.

b. ☒ was recorded on July 21, 1998 at Reel 9351, Frame 0356.

18. The power of attorney in the prior application is to:

<u>KONSTANTINE J. DIAMOND</u>	<u>39,657</u>
Name of Attorney of Record	Reg. No.

☐ The power appears in the original papers in the prior application.

☒ The power does not appear in the original papers, but was filed on 4-29-99.


☐ A new power has been executed and is attached.

19. Correspondence Address: Please address all future communications to:

KONSTANTINE J. DIAMOND,  
 Brooks & Kushman P.C.,  
 1000 Town Center, 22nd Fl.  
 Southfield, MI 48075-1351  
 Telephone: 248-358-4400; Fax: 248-358-3351

Respectfully submitted,

Date November 15, 1999

  
 Name: KONSTANTINE J. DIAMOND  
 Registration No.: 39,657

☒ Attorney or agent of record  
☐ Filed under Rule 34(a)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Group Art Unit: 3624

WILLIAM P. APPS ET AL.

Examiner: J. Wilkens

Continuation of U.S. Serial No. 09/004,389;  
filed: January 8, 1998

Filed: Herewith

For: PLASTIC PALLET

Attorney Docket No.: RPC 0491 PUS

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Please note that the continuation application as filed herein incorporates amendments to the specification made during prosecution of the parent application, U.S. Application Serial No. 09/004,389, said parent application being presently allowed and awaiting issuance.

Please amend the specification of the above-identified continuation application as follows:

**In The Specification**

Please amend the specification by inserting before the first line of the application the following:

**- - Cross-reference To Related Application**


This application is a continuation of co-pending application Serial No. 09/004,389 filed on January 8, 1998. - -

**REMARKS**

The above amendment to the specification has been made to set forth the claim of priority for this application. Any questions regarding this paper may be directed to the undersigned.

Respectfully submitted,

**WILLIAM P. APPS ET AL.**

By 

Konstantine J. Diamond

Reg. No. 39,657

Attorney/Agent for Applicant

Date: November 15, 1999

**BROOKS & KUSHMAN P.C.**

1000 Town Center, 22nd Floor  
Southfield, MI 48075

Phone: 248-358-4400

Fax: 248-358-3351

## PLASTIC PALLET

### BACKGROUND

5 This invention relates to pallets for supporting freight, goods or other materials, and more particularly to a pallet made of synthetic resin for use with a fork lift.

10 Pallets made of molded plastic material have distinct advantages over those made of wood or metal. Wood pallets are heavy; are subject to warpage, splintering and splitting; are nonuniform in strength; and gain significant weight when wet. Metallic pallets typically are expensive and, in the case of steel, heavy and subject to corrosion. Plastic pallets, while stronger, lighter and more durable than wooden pallets, nevertheless have shortcomings of their own.

15 In an effort to minimize mold costs, some plastic pallets have been designed as modular units which consist of a plurality of identical molded elements that are snapped, fused or otherwise secured together to make a complete pallet. Examples of this type of pallet are disclosed in U.S. Patent Nos. 4,051,787; 4,597,338; and 5,197,395. However, this is a compromise scheme which usually yields a pallet that is made of more material (and is therefore heavier and has a higher material cost) than would be required if the upper and lower portions of the pallet were optimally designed to serve their diverse purposes.

20 Specifically, the top deck of a pallet should have relatively small openings so as to adequately support the load across substantially the entire upper surface of the pallet; it must be stiff enough (usually afforded by substantial ribbing) to prevent excessive bending, either when resting on the forks of a fork lift, or resting on the supports that separate the upper and lower decks; and its upper surface  
25 should not have recesses or crevices which could collect water or dirt. The top decks of the pallets disclosed in the aforementioned patents have these features. In contrast, the bottom of the pallet, which normally is intended to rest on a substantially solid surface, such as a floor, deck, shelf or rack, need not have as

much material on its underside in contact with the supporting surface. Thus, the bottom deck of a plastic pallet may have relatively large openings, and may have exposed ribs, recesses and crevices on its underside, as long as the design provides adequate support for the loaded pallet. An upper pallet deck which is inverted to serve as a lower deck thus would have more material than actually required to perform the functions of a lower deck.

Figs. 8-19 of U.S. Patent No. 4,051,787 depict examples of a pallet which has relatively large openings in its bottom deck. However, the structure surrounding these openings appears to be quite thick and massive, with a large, closed bottom surface area that would contact a supporting surface. The bottom deck thus would appear to contain more material than is actually required.

Some pallets which comprise identical molded halves require a plurality of separate fastening elements to secure the halves together. U.S. Patent Nos. 2,699,912 and 5,197,395 disclose examples of these types of pallets. The use of separate fastening elements introduces added cost and assembly time to pallet construction.

Efforts to minimize the amount of plastic material used in a pallet have led some to devise hybrid constructions wherein discrete reinforcing rods are integrated onto the molded pallet. An example is disclosed in U.S. Patent No. 4,316,419, which uses metal reinforcing rods that are inserted into channels molded into the pallet. The problem with these types of pallets is that they require separately manufactured additional components, and additional assembly steps.

Another problem with plastic pallets in general is that their surfaces tend to be slippery. Measures must be taken to prevent the load from sliding off the pallet; to keep stacked pallets, whether loaded or not, from sliding off one another; and to keep the pallet from sliding off the forks of the fork lift. Common anti-slip measures involve the use of anti-slip coatings or rubber inserts, such as pads or grommets, placed in strategic locations. Examples are shown in Figs. 20-25 of U.S. Patent No. 4,051,787. One problem with these anti-slip measures is that they require

the installation of additional parts or materials. Further, anti-slip coatings can wear away, while inserts can work loose and fall off during use, rendering them ineffective.

5 In the bottled beverage industry, filled and capped bottles are placed in bottle crates, which are loaded onto pallets and moved about using a fork lift. The crates typically are of the low depth variety, such that the bottles project above the upper edges of the crates. As long as the bottles are of uniform height, it is desirable to stack several loaded pallets on top of one another so that they can be moved about collectively by fork lift, and efficiently stored in a stacked configuration either on a floor or on a shelf or rack. The bottom deck of the pallet must be designed so that the load of one pallet is evenly distributed over the closures of the bottles on the subjacent pallet. Existing pallet constructions do not adequately address this need.

### SUMMARY OF THE INVENTION

15 It is, therefore, an object of the present invention to provide a rigid, durable plastic pallet that can be fabricated from just one type of material without using an excessive amount of that material.

It is another object of the invention to provide a plastic pallet which comprises a minimum number of parts, and does not require separate fasteners to secure the pallet parts together, so as to simplify pallet assembly.

20 Another object of the invention is to provide a plastic pallet which is suitable for use in the bottled beverage industry, allowing one loaded pallet to be stacked on and supported by the bottles carried by a subjacent pallet.

25 A further object of the invention is to provide a plastic pallet that possesses sufficient anti-slip characteristics in the critical load-contacting, fork-contacting and bottom support regions without resort to the application or attachment of diverse anti-slip elements or materials.



These and other objects are achieved by providing an improved pallet made of a synthetic resin wherein the underside of the upper deck is substantially planar, and the supports that separate the upper and lower decks are integrally formed with and project upwardly from the lower deck, and are secured to the  
5 underside of the upper deck.

The upper ends of the supports preferably are received in recesses in the underside of the upper deck, and the recesses and the supports preferably have mating elements which snap-actingly engage one another to lock the supports in the  
10 recesses when the decks are assembled.

Preferably, the supports are tapered, the lower ends of the supports being wider than the upper ends thereof. The supports are hollow and have internal upright stiffening ribs which project inwardly from the side wall of the support.

In a preferred embodiment, the pallet is rectangular and has nine  
15 supports, the largest one located at the center, one located at each corner, and located one at the middle of each side, so as to form a four-way pallet which can be engaged by a fork lift from any side. The bottom deck comprises a rectangular perimeter base from which the perimeter supports project, and an integrally formed X-shaped central base from which the central support projects, the central base joining with the  
20 perimeter base medially of each side thereof. These base portions define four large openings through the bottom deck, and preferably are beveled on their edges. Reinforcing ribs on the underside of the base portions are more closely spaced in the regions beneath the supports.

In another aspect of the invention, an improved synthetic resin pallet  
25 is provided wherein the top surface of the upper deck, the bottom surface of the lower deck, and the underside of the upper deck in the fork-receiving regions between the supports have a slip-resistant scuffed texture. Preferably the scuffed texture comprises a multidirectional scuffing pattern. A preferred method of creating such a scuffing pattern is by brushing the surfaces with at least one cup-shaped wire  
30 brush.

## BRIEF DESCRIPTION OF DRAWINGS

A preferred embodiment of the invention is described in detail below and illustrated in the accompanying drawings, in which:

5 Fig. 1 is a top perspective view of a preferred embodiment of an assembled pallet according to the invention;

Fig. 2 is a bottom perspective view of the pallet of Fig. 1;

Fig. 3 is a top plan view of the pallet of Fig. 1;

Fig. 4 is a bottom plan view of the pallet of Fig. 1;

10 Fig. 5 is a side elevational view of the pallet of Fig. 1, all of the sides being identical;

Fig. 6 is a top perspective, exploded view of the pallet of Fig. 1, showing the upper and lower decks juxtaposed for assembly;

Fig. 7 is a bottom perspective, exploded view of the pallet of Fig. 6;

15 Fig. 8 is a side elevational, exploded view of the pallet of Fig. 6;

Fig. 9 is a top perspective view of the upper deck of the pallet of Fig. 6;

Fig. 10 is a bottom perspective view of the upper deck of Fig. 9;

Fig. 11 is a top plan view of the upper deck of Fig. 9;

20 Fig. 12 is a bottom plan view of the upper deck of Fig. 9;

Fig. 13 is a top perspective view of the lower deck of the pallet of Fig. 6;

Fig. 14 is a bottom perspective view of the lower deck of Fig. 13;

Fig. 15 is a top plan view of the lower deck of Fig. 13;

5 Fig. 16 is a bottom plan view of the lower deck of Fig. 13;

Fig. 17 is a partial sectional view taken along line 17-17 in Fig. 1;

Fig. 18 is a partial sectional view taken along line 18-18 in Fig. 6; and

Fig. 19 is a schematic perspective view of a method for scuffing selected surfaces of the pallet.

## 10 DETAILED DESCRIPTION

The pallet consists of two separately molded parts - an upper deck 10 and a lower deck 40 - which are injection molded of a suitable synthetic resin, such as high density polyethylene, polypropylene, or filled polypropylene. In plan view, the pallet is square, with rounded corners, and has four-way symmetry. As explained more fully below, the two decks are adapted to be easily snapped together to form the finished pallet illustrated in Figs. 1-5. Figs. 6-8 illustrate how the two decks are aligned for assembly. For added rigidity, the decks may be permanently welded together using any known resin welding technique.

20 Figs. 9-12 depict the upper deck 10. This deck has a solid top surface 12 interrupted by a series of triangular holes 15, which reduce the weight of the deck and allow for drainage in the event the pallet becomes wet.

Referring to Figs. 10 and 12, a series of ribs are formed on the underside of upper deck 10. Some of these ribs form a central, square recess 14 with

rounded corners. Other ribs form a circular recess 16 at each corner of the deck. Still other ribs form oblong recesses 18 with rounded ends at the mid-point of each side of the deck. As described below, these nine recesses are adapted to receive the upper ends of nine supports which are integrally molded with lower deck 40. The

5 areas between the recesses are fork-receiving regions which are intended to rest on the forks of a fork lift that can engage the pallet from any side.

Other ribs on the underside of upper deck 10 form an orthogonal pattern which runs parallel and perpendicular to the sides of the deck, while still other ribs form another orthogonal pattern that is set at 45° to the first pattern.

10 These ribs collectively form interconnected girder-like structures which span the spaces between the support-receiving recesses 14, 16 and 18. As can be seen in Fig. 8, the underside of upper deck 10 is substantially planar, i.e., substantially all of the ribs on its underside terminate in a common plane.

In each of the recesses 14, 16, 18 are four depending snap tabs 20.

15 Details of snap tabs 20 can be seen in Figs. 17 and 18. Each has a flexible shank portion 22 and a tapered tip 24 with a shoulder 26 which snaps under a lip of the mating support of lower deck 40. Adjacent each snap tab 20 in the circular corner recesses 16 is a small arcuate slot or hole 28. A similar but rectangular slot or hole 30 lies adjacent each snap tab 20 in the other recesses 14, 18. Slots 28, 30 facilitate

20 formation of the snap tabs during the molding operation, and also allow insertion of a separation tool which can be used to depress the snap tabs and separate the upper and lower decks if desired.

Lower deck 40 has a perimeter which substantially matches the perimeter of upper deck 10. Referring to Figs. 13-16, lower deck 40 comprises a

25 rectangular perimeter base 42 and an integrally formed X-shaped central base 44. Bases 42 and 44 have beveled edges 46, and oblong apertures 48.

Four corner supports 50 project upwardly from lower deck 40 at the corners thereof. Supports 50 have a circular cross section and a frustoconical shape, with the base wider than the top. Four medial side supports 52 project upwardly

from the sides of perimeter base 42. Side supports 52 are oblong in cross section with rounded ends, and also are tapered, with the wider portion at the bottom. A large central support 54 projects upwardly from the center of central base 44. Central support 54 has a generally square cross section with rounded corners, and also is tapered with the wider portion at the bottom. The corners of central support 54 protrude into the large openings 56 in lower deck 40 which are defined by the intersecting base portions 42, 44.

Each support 50, 52, 54 is hollow, and has internal upright stiffening ribs 60, which project inwardly from the side wall of the support. The upper end of each support is turned inwardly to form a horizontal peripheral lip 62. Referring to Figs. 17 and 18, when the upper and lower decks are pressed together during assembly, the sloped portion 24 of each snap tab 20 rides past lip 62, causing the snap tab to bend inwardly. When shoulder 26 clears lip 62, the snap tab springs outwardly to be captured beneath lip 62.

As seen in Figs. 14 and 16, the underside of lower deck 40 has several series of reinforcing ribs which provide structural rigidity to the base portions 42, 44, and properly distribute the load carried by the upper deck 10 and the supports 50, 52, 54. In the regions which underlie the supports, the ribbing is more closely spaced than elsewhere in the base portions. This arrangement better distributes the load from the top of the pallet, and also makes the pallet better suited for use in the bottled beverage industry, where one loaded pallet may be placed directly on top of the bottle closures of bottles carried by another pallet. All spaces between the ribs on the underside of lower deck 40 are sized to prevent the smallest bottle closures (approximately 28 mm) from fitting between the ribs.

The synthetic resins used to form the pallet typically have a rather slippery surface finish when the pallet is new. This is undesirable in certain critical areas, viz., the top of the upper deck 10, the underside of the lower deck 40, and the underside of upper deck 10 in the regions between the supports, which rest on the forks of a fork lift. In accordance with the invention (see Fig. 19), these critical areas are subjected to an anti-slip treatment which comprises wire brushing the

surfaces S, preferably with at least one rotating cup-shaped wire brush B, to produce a scuffed texture having a multi-directional scuffing pattern. This is done before the upper and lower decks are joined together. The anti-slip characteristics of this scuffed surface do not appear to degrade over time because normal use and handling of the pallet appears to subject the surfaces to additional scuffing as the pallet is loaded, unloaded, and moved about.

The advantages of the pallet according to the invention will be readily apparent to those skilled in the art. The symmetrical two-piece injection molded plastic construction affords substantial strength and durability, simplicity, and easy assembly. The snap tabs 20 are protected from damage prior to assembly because they are recessed into the upper deck. A substantial amount of open area strategically placed within the structure minimizes the amount of material required, without comprising structural rigidity. The tapered shape of the supports allows for easy assembly, and good load dispersion from the upper deck to the lower deck. The supports have smooth, rounded outsides to prevent damage from the forks of a fork lift. The top deck completely covers the supports, preventing debris from collecting in the hollow areas. The pallet is easy to keep clean and wash because all of the exposed support ribs are on the underside of both decks, and there are no crevices to collect dirt or water. The bottom of the lower deck is designed to transfer the load evenly to bottle closures when pallets loaded with beverage bottles are stacked on one another. In particular, the critical load areas beneath the supports are heavily reinforced with a maximum surface area to evenly load the layer of bottles on the pallet below. Finally, the anti-slip scuffed surface treatment is a simple, long-lasting and reliable solution to the problem of slippery decks and fork contacting surfaces.

While a square pallet has been illustrated and described in the preferred embodiment, other shapes, e.g., rectangular, would suffice while still embodying the features of the invention. The cross sectional shapes of the supports 50, 52, 54 also may vary somewhat from those shown. Other modifications will be apparent to those skilled in the art without departing from the true spirit and scope of the invention, which is limited only by the appended claims.

**WHAT IS CLAIMED IS:**

1                   1.       In a synthetic resin pallet, for use with a fork lift, comprising  
2 separately molded upper and lower decks spaced apart by a plurality of supports to  
3 define therebetween fork-receiving regions beneath the upper deck, the improvement  
4 wherein the underside of the upper deck is substantially planar, and the supports are  
5 integrally formed with and project upwardly from the lower deck and are secured to  
6 the underside of the upper deck.

1                   2.       A pallet according to claim 1 wherein the upper ends of the  
2 supports are received in recesses in the underside of the upper deck.

1                   3.       A pallet according to claim 2 wherein the recesses and the  
2 supports have integrally formed mating elements which snap-actively engage one  
3 another to lock the supports in the recesses when the upper and lower decks are  
4 assembled.

1                   4.       A pallet according to claim 2 wherein the supports are tapered,  
2 the lower ends of the supports being wider than the upper ends thereof.

1                   5.       A pallet according to claim 4 wherein each of the supports is  
2 hollow and has therein upright stiffening ribs which project inwardly from the side  
3 wall of the support.

1                   6.       A pallet according to claim 1 wherein the supports are tapered,  
2 the lower ends of the supports being wider than the upper ends thereof.

1                   7.       A pallet according to claim 1 wherein one of the supports is  
2 located substantially at the center of the pallet, and the other supports are located  
3 substantially at the periphery of the pallet, the central support being the largest  
4 support.

1                   8.     A pallet according to claim 7 wherein the pallet is generally  
2 rectangular with nine supports between the decks, one support being located at each  
3 corner of the pallet, and one support being located medially of each side of the pallet,  
4 the supports defining two fork-receiving regions for forks entering from each side  
5 of the pallet.

1                   9.     A pallet according to claim 8 wherein the bottom deck  
2 comprises a generally rectangular perimeter base from which the peripheral supports  
3 project, and an integrally formed X-shaped central base from which the central  
4 support projects, the central base joining with the perimeter base medially of each  
5 side thereof.

1                   10.    A pallet according to claim 9 wherein the perimeter base and  
2 the central base define four large openings through the bottom deck.

1                   11.    A pallet according to claim 10 wherein the corners of the  
2 central support protrude into the large openings.

1                   12.    A pallet according to claim 11 wherein the underside of the  
2 perimeter base and the underside of the central base have reinforcing ribs, the  
3 reinforcing ribs beneath the supports being more closely spaced than elsewhere in the  
4 perimeter base and the central base.

1                   13.    A pallet according to claim 11 wherein the corner supports are  
2 circular in cross-section, the medial side supports are oblong in cross-section with  
3 rounded ends in the areas adjacent the fork-receiving regions, and the central support  
4 is rectangular in cross-section with rounded corners.

1                   14.    A pallet according to claim 13 wherein the supports are  
2 tapered, the lower ends of the supports being wider than the upper ends thereof.

1                   15.    A pallet according to claim 14 wherein the top of the perimeter  
2 base and the top of the central base have beveled edges.



1                    16.    A pallet according to claim 14 wherein each of the supports is  
2 hollow and has therein upright stiffening ribs which project inwardly from the side  
3 wall of the support.

1                    17.    A pallet according to claim 13 wherein the top of the perimeter  
2 base and the top of the central base have beveled edges.

1                    18.    In a synthetic resin pallet, for use with a fork lift, comprising  
2 upper and lower decks spaced apart by a plurality of supports to define therebetween  
3 fork-receiving regions beneath the upper deck, the improvement wherein the top  
4 surface of the upper deck, the bottom surface of the lower deck, and the underside  
5 of the upper deck in the fork-receiving regions have a slip-resistant scuffed texture.

1                    19.    A pallet according to claim 18 wherein the upper and lower  
2 decks are separately molded, and the scuffed texture is created by wire-brushing said  
3 surfaces before the decks are assembled to form a finished pallet.

1                    20.    A pallet according to claim 19 wherein the scuffed texture  
2 comprises a multidirectional scuffing pattern.

1                    21.    A pallet according to claim 20 wherein the scuffed texture is  
2 created by brushing said surfaces with at least one cup-shaped wire brush.

## ABSTRACT OF THE DISCLOSURE

5 An improved pallet made of a synthetic resin wherein the underside  
of the upper deck is substantially planar, and the supports which separate the upper  
and lower decks are integrally formed with and project upwardly from the lower  
deck, and are secured to the underside of the upper deck. The upper ends of the  
supports are received in recesses in the underside of the upper deck, and the recesses  
10 and the supports preferably have mating elements which snap-actively engage one  
another to lock the supports in the recesses when the decks are assembled.  
Preferably, the supports are tapered, the lower ends of the supports being wider than  
the upper ends thereof. Top surface of the upper deck, the bottom surface of the  
lower deck, and the underside of the upper deck in the fork-receiving regions  
between the supports may have a slip-resistant scuffed texture.

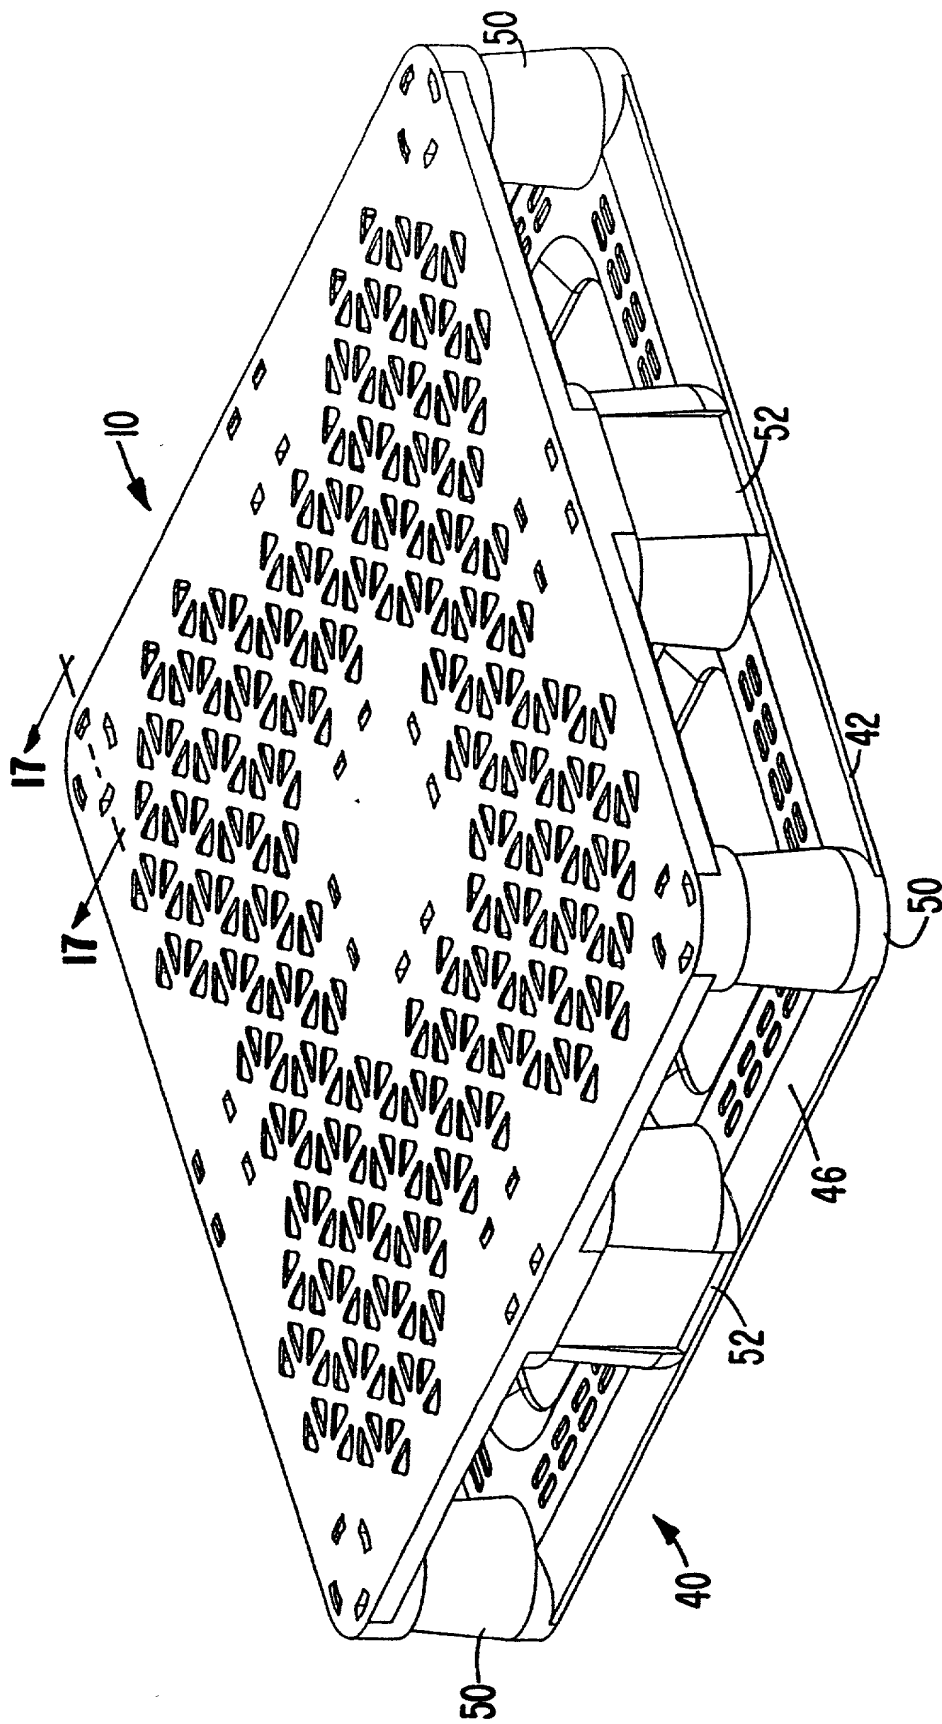


Fig. 1

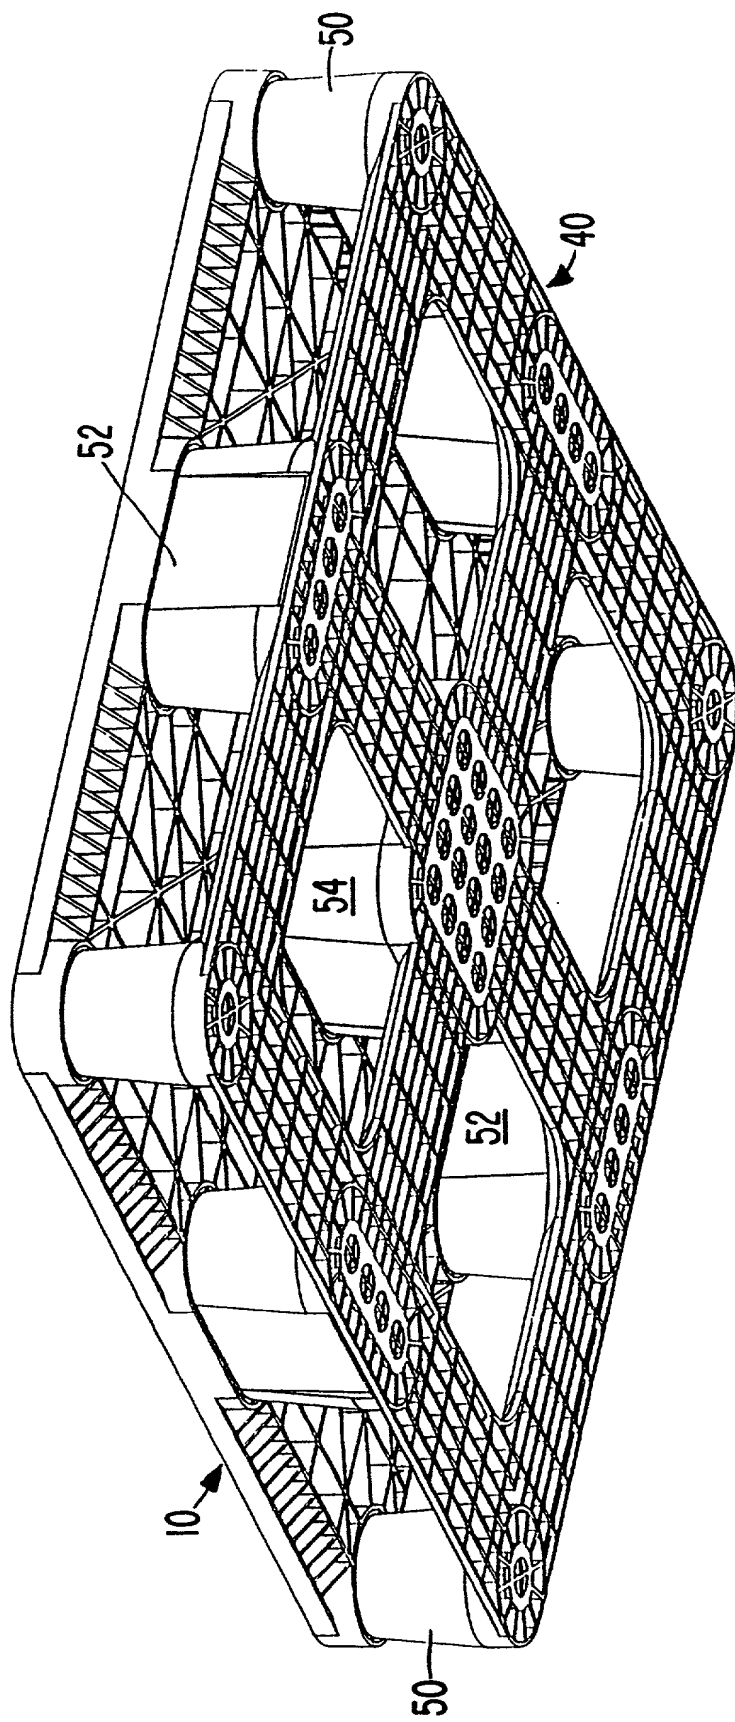


Fig. 2

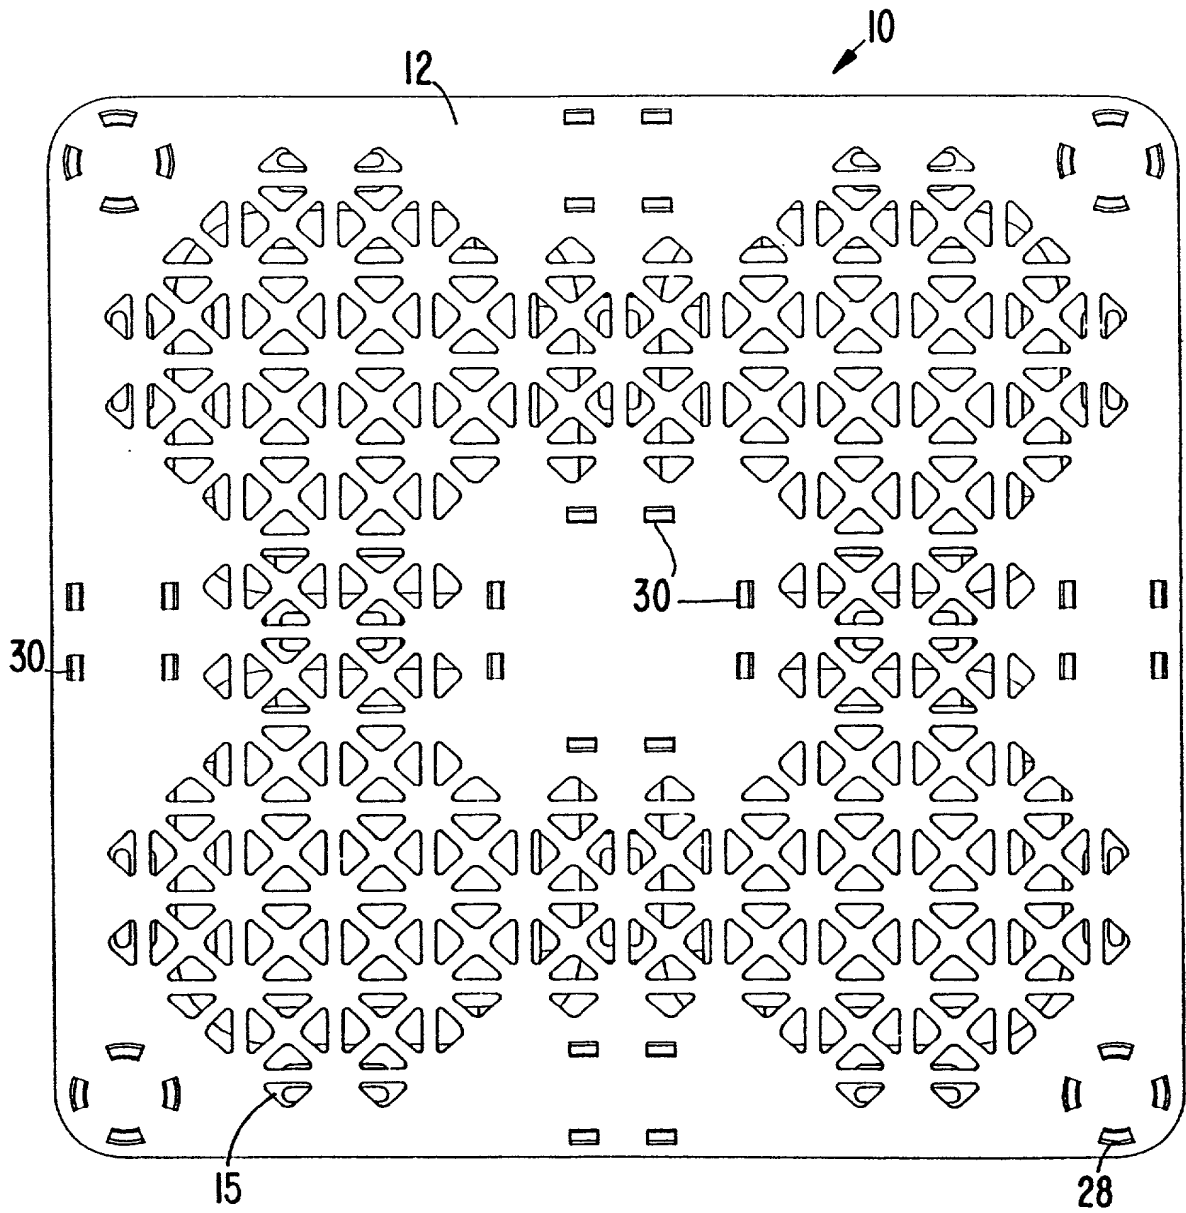


Fig. 3



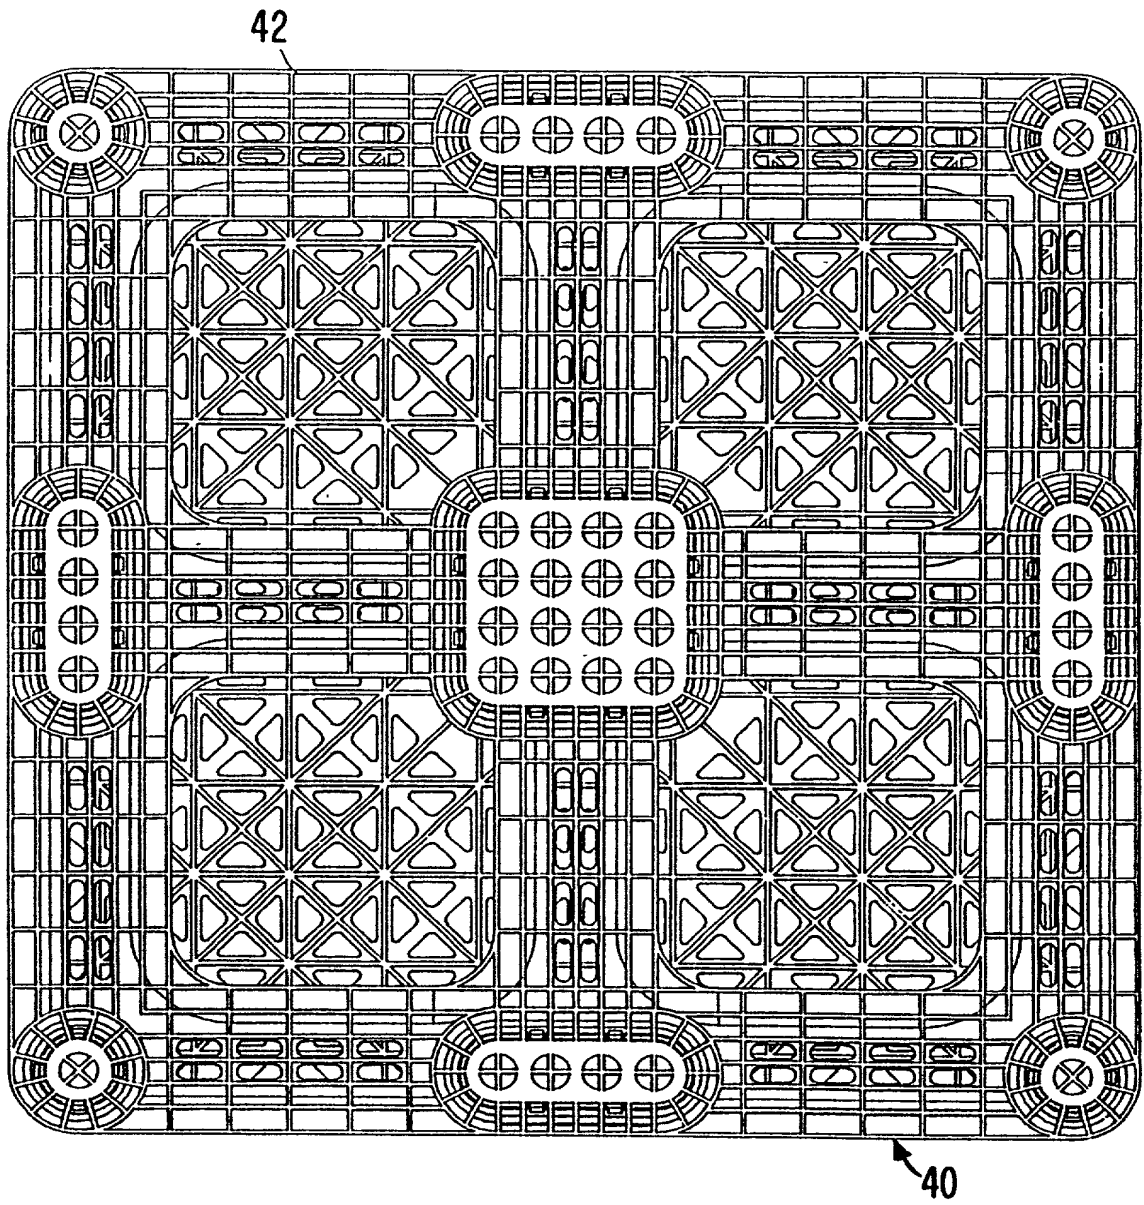



Fig. 4

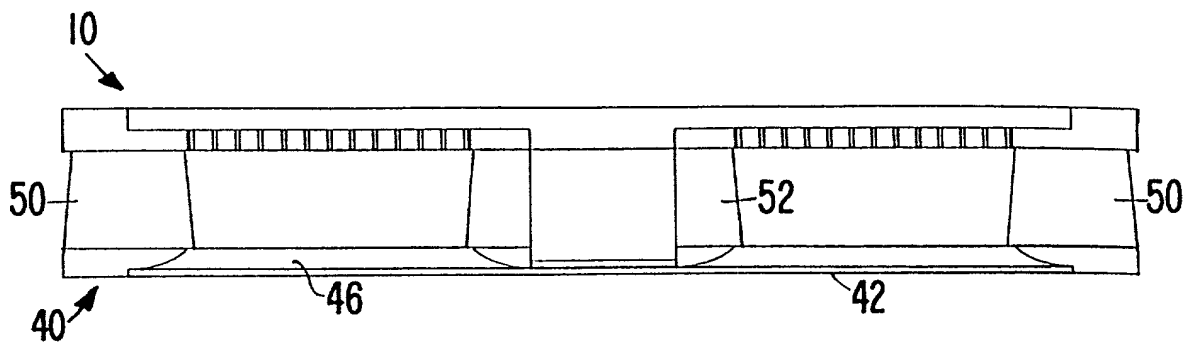

*Fig. 5*

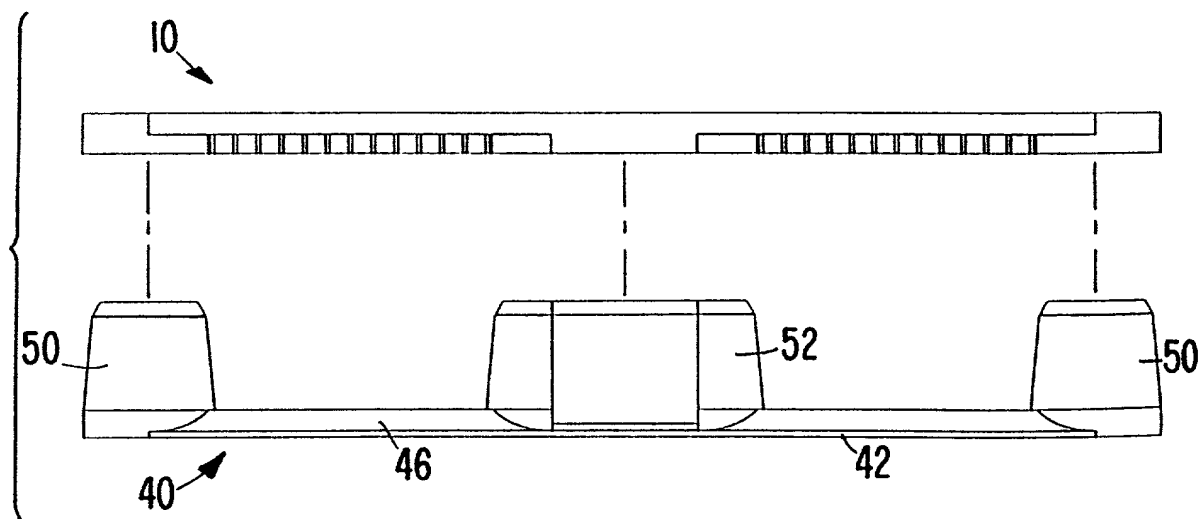

*Fig. 8*

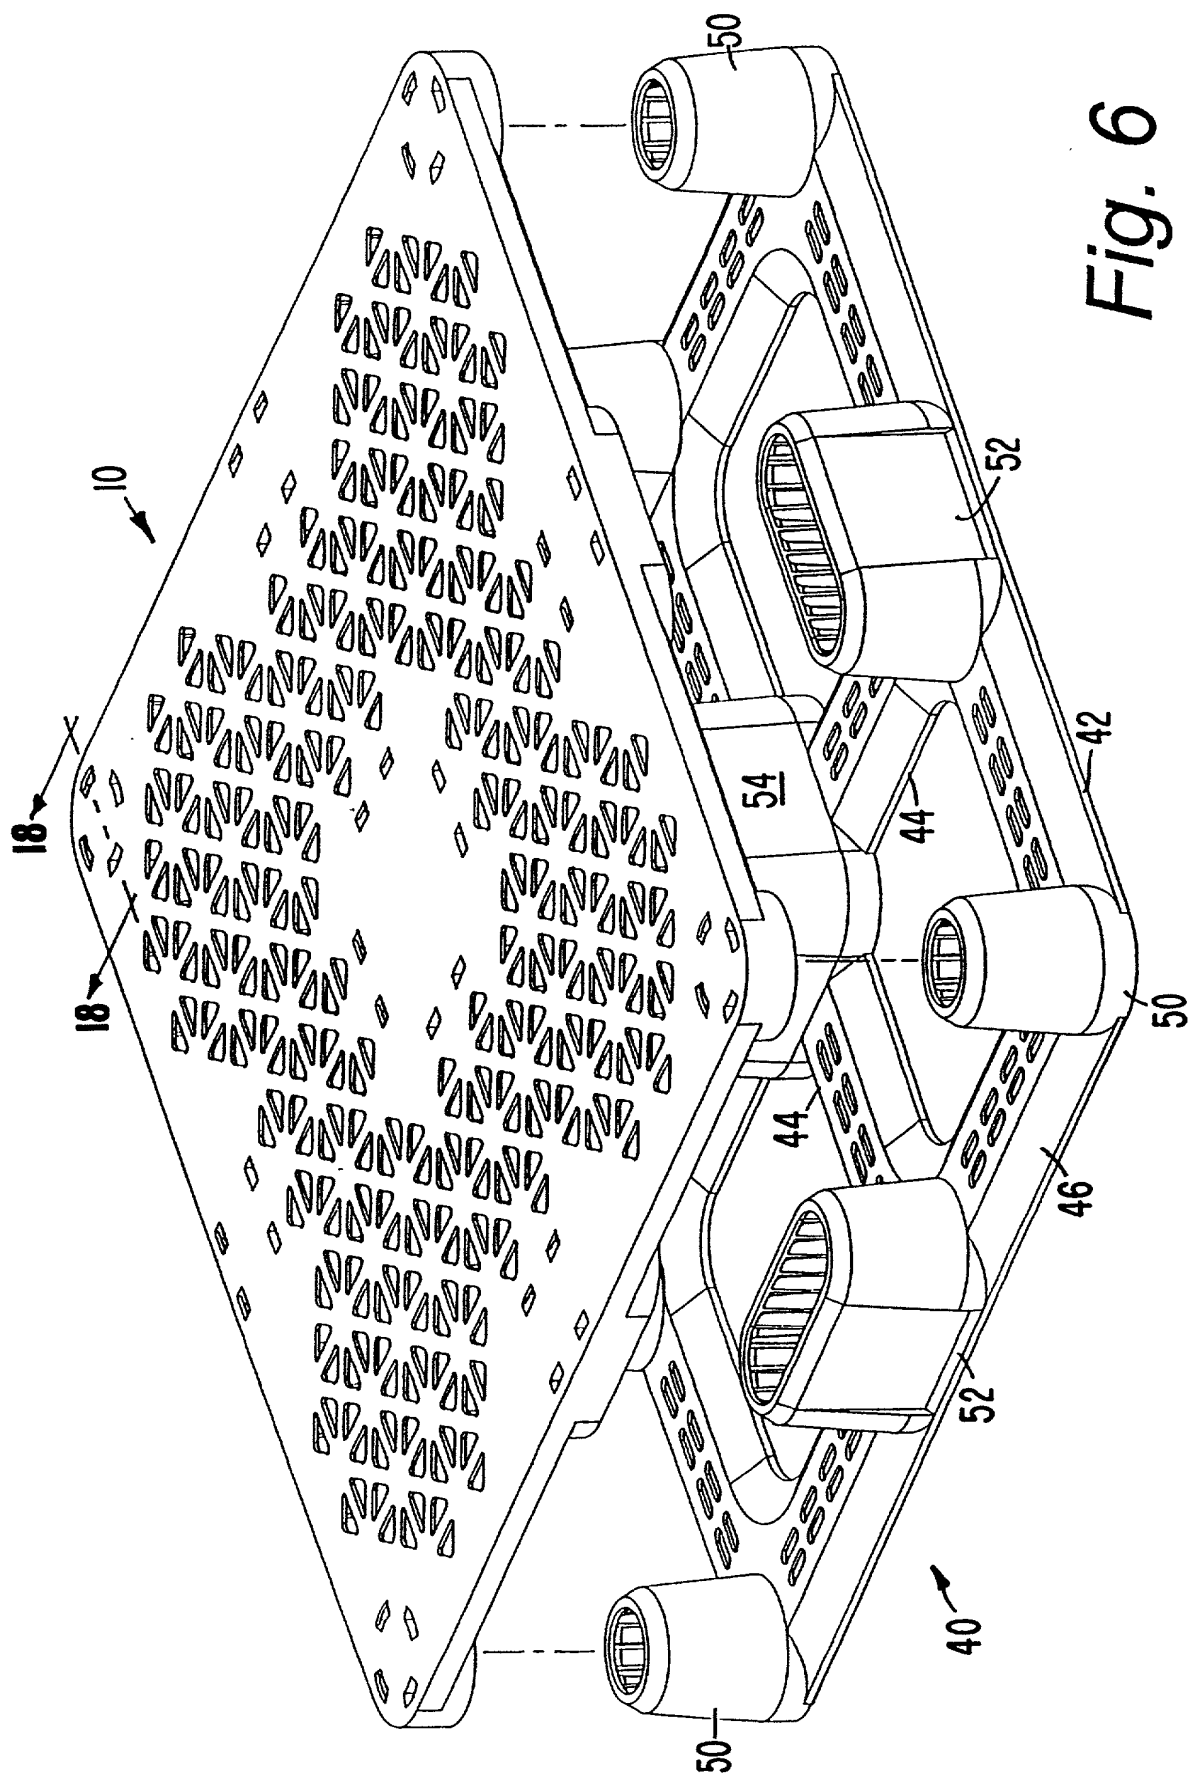

**Fig. 6**





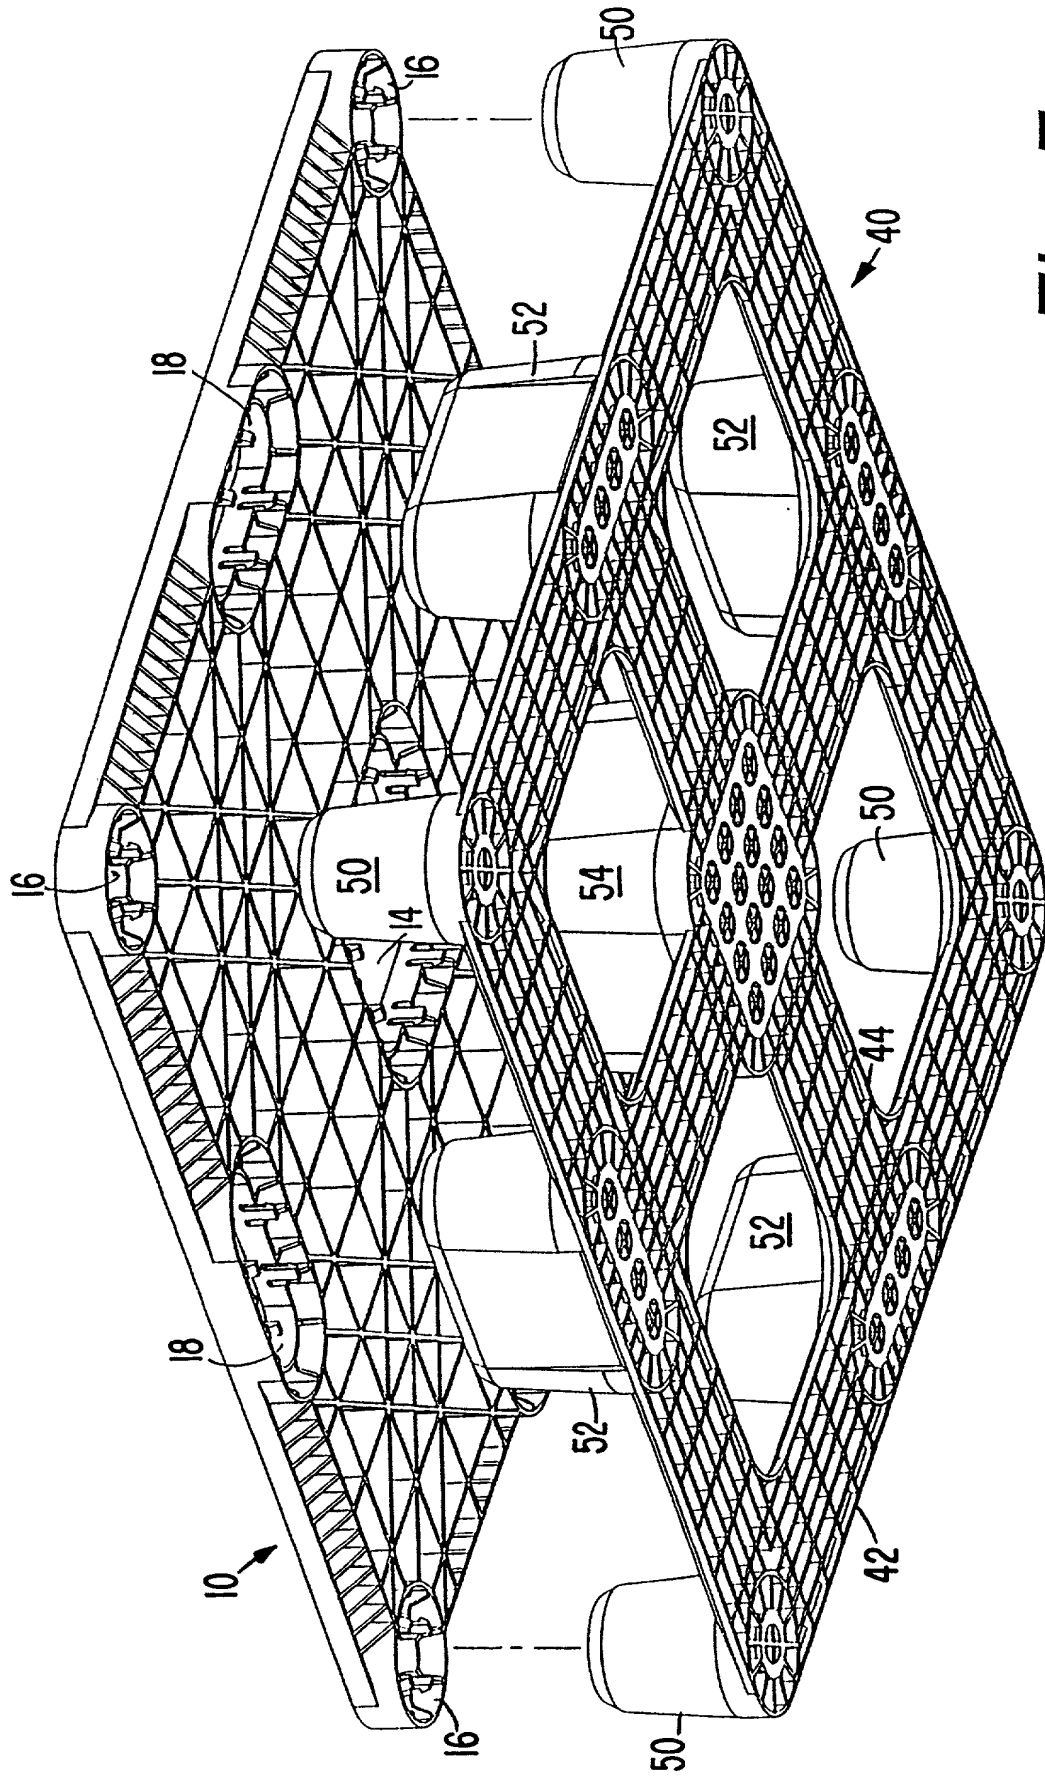


Fig. 7

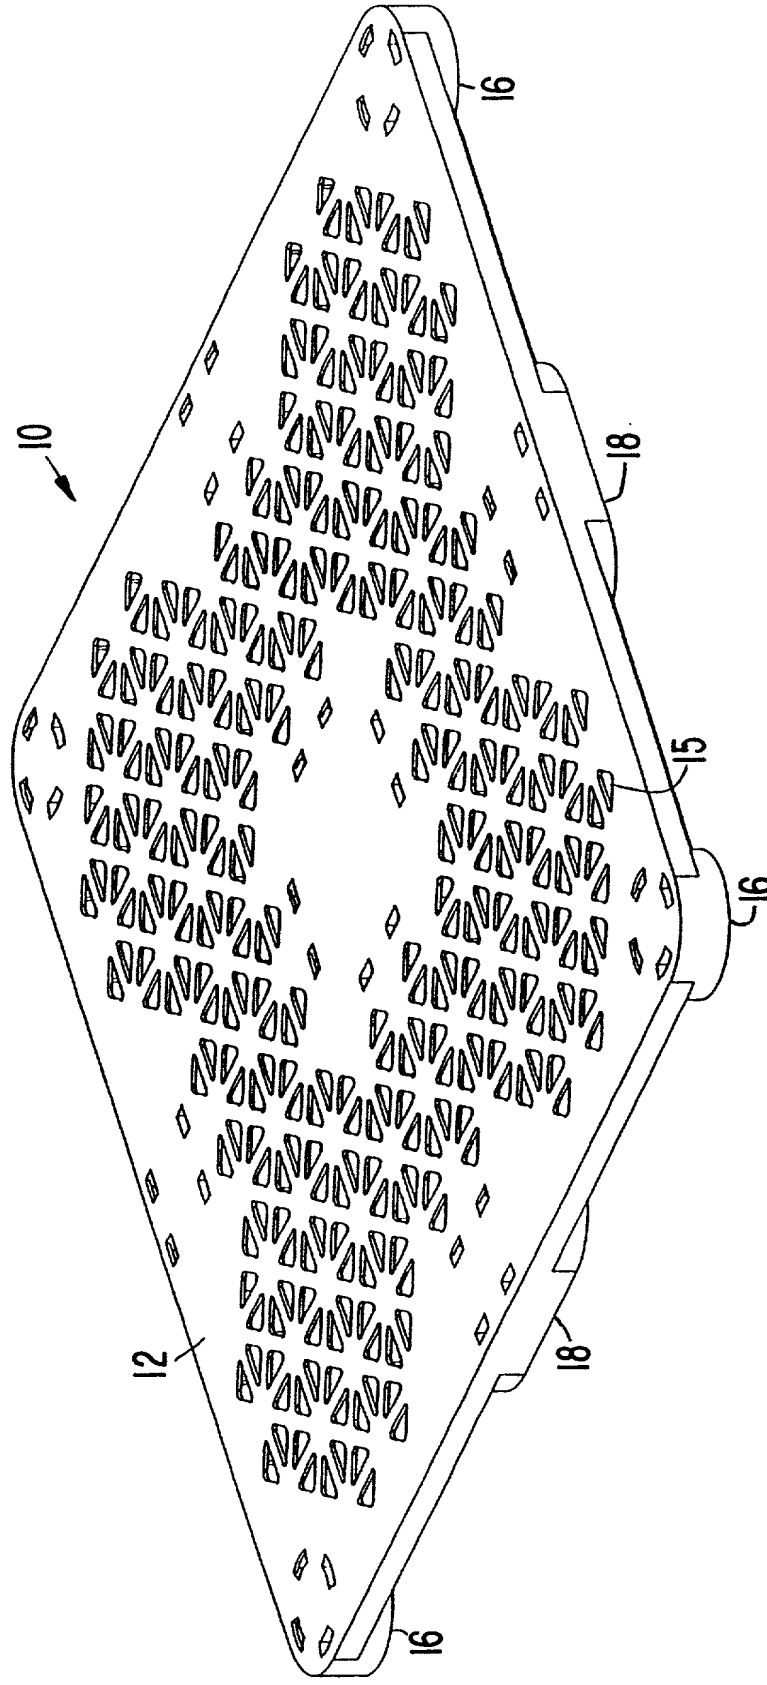

**Fig. 9**

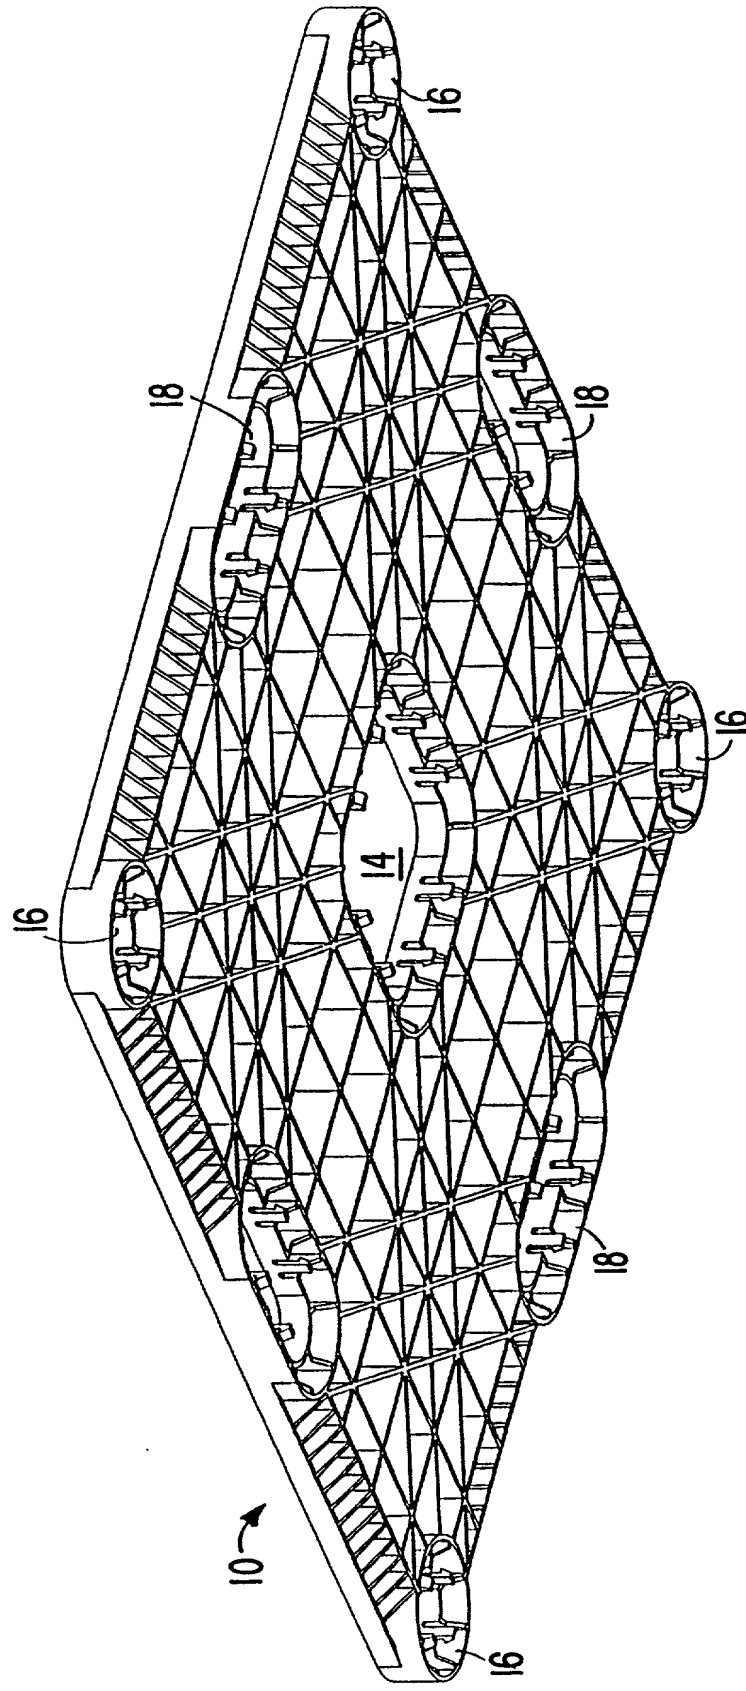

**Fig. 10**



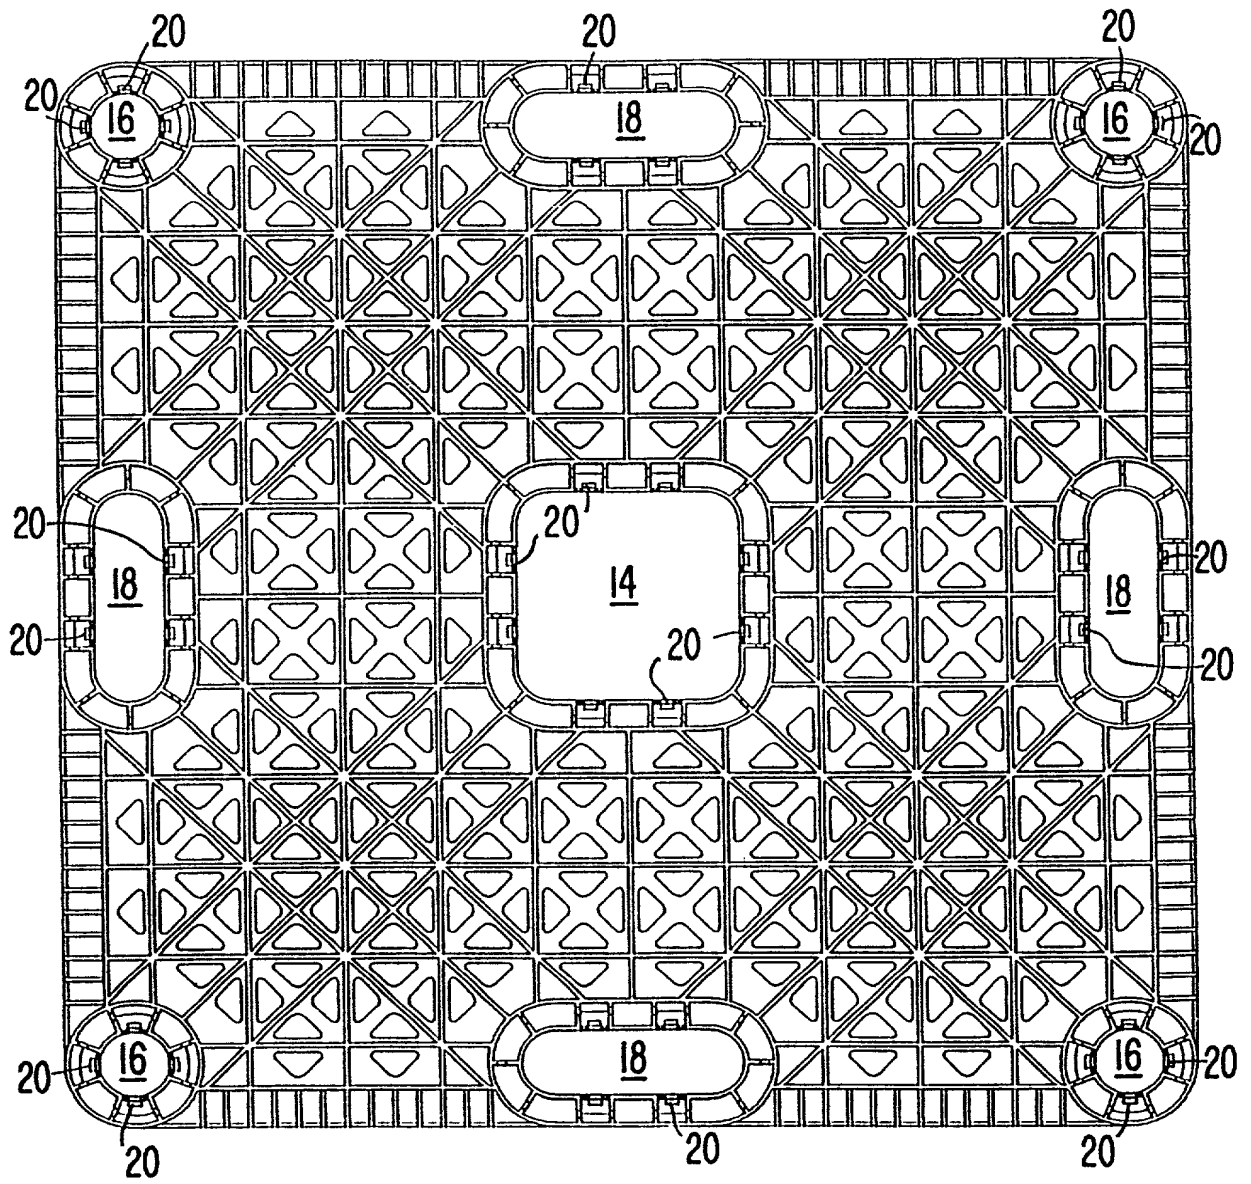


Fig. 12

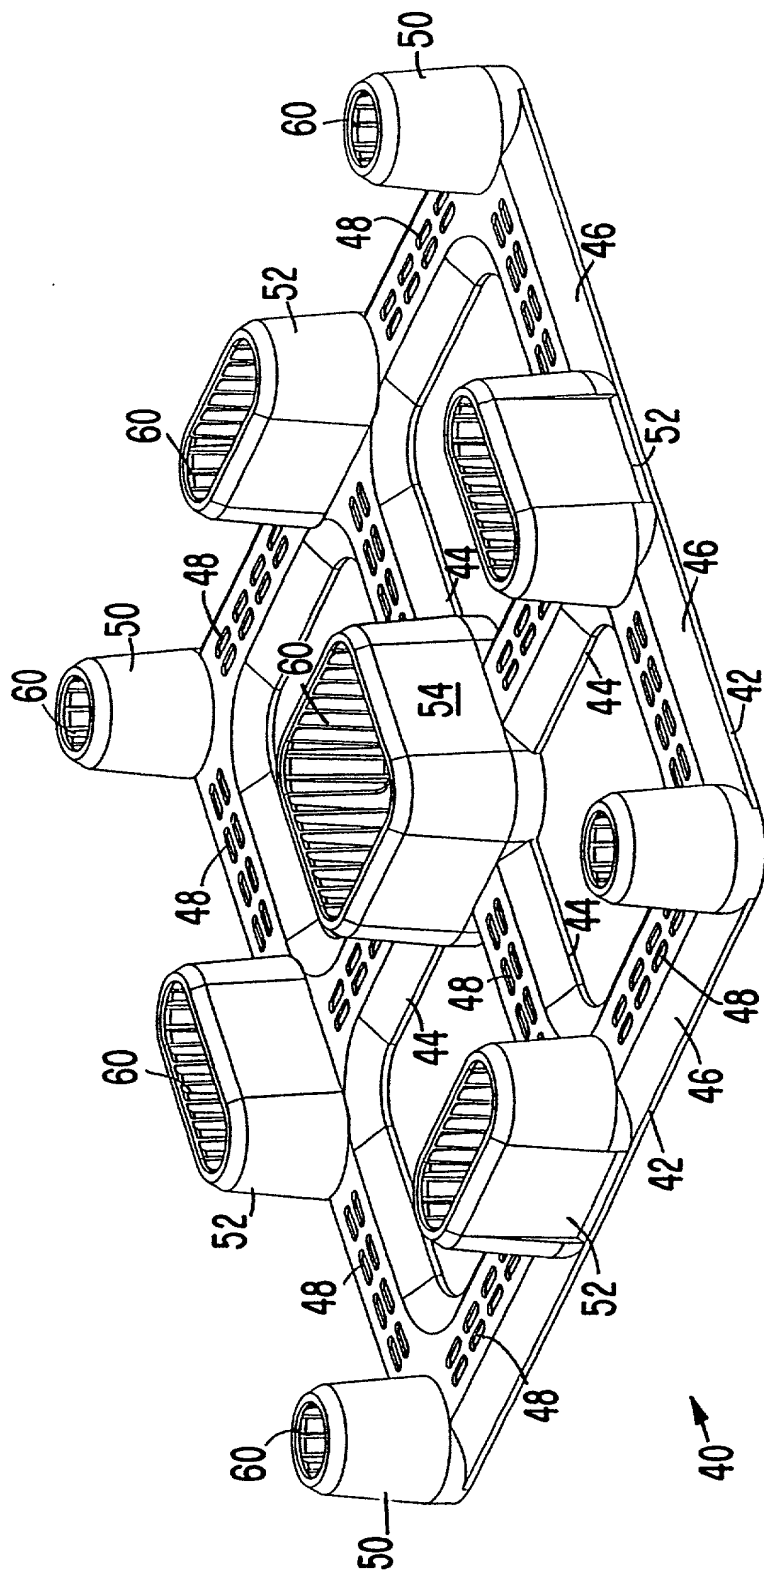


Fig. 13

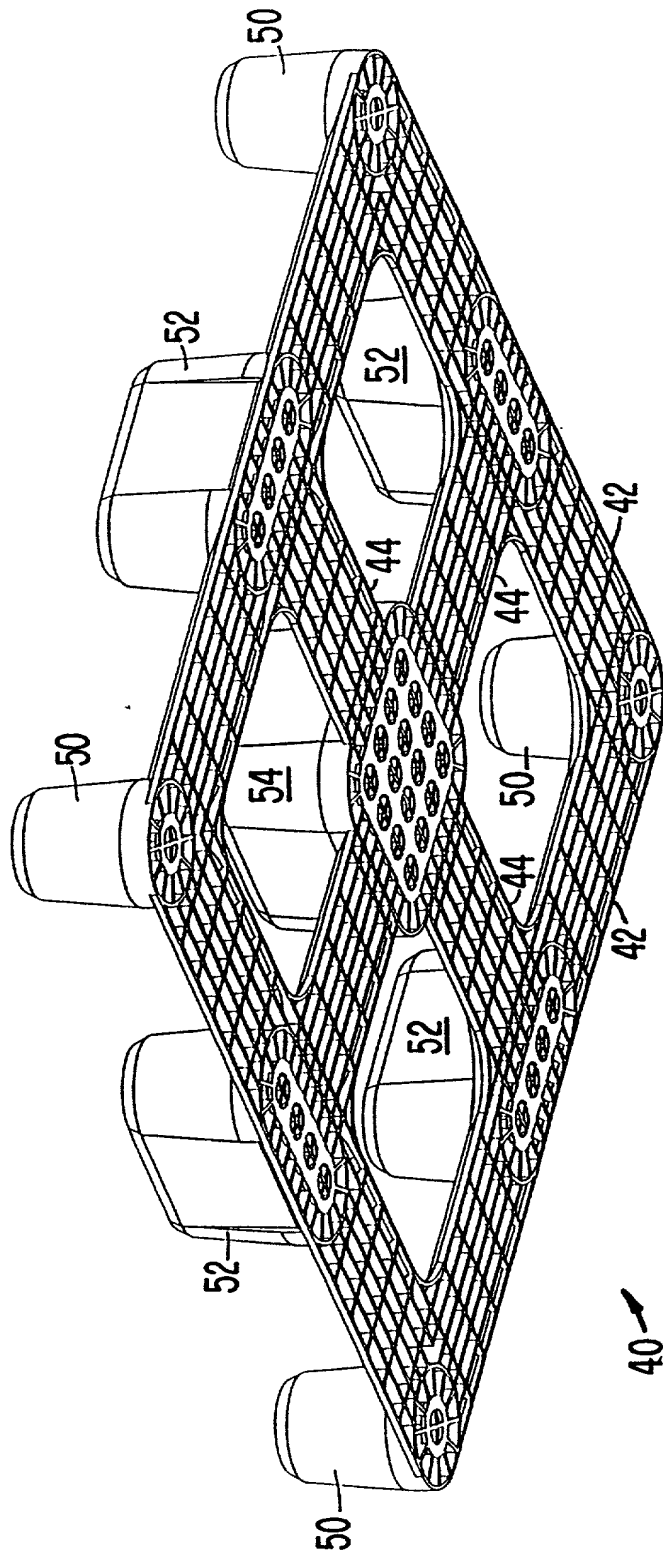


Fig. 14

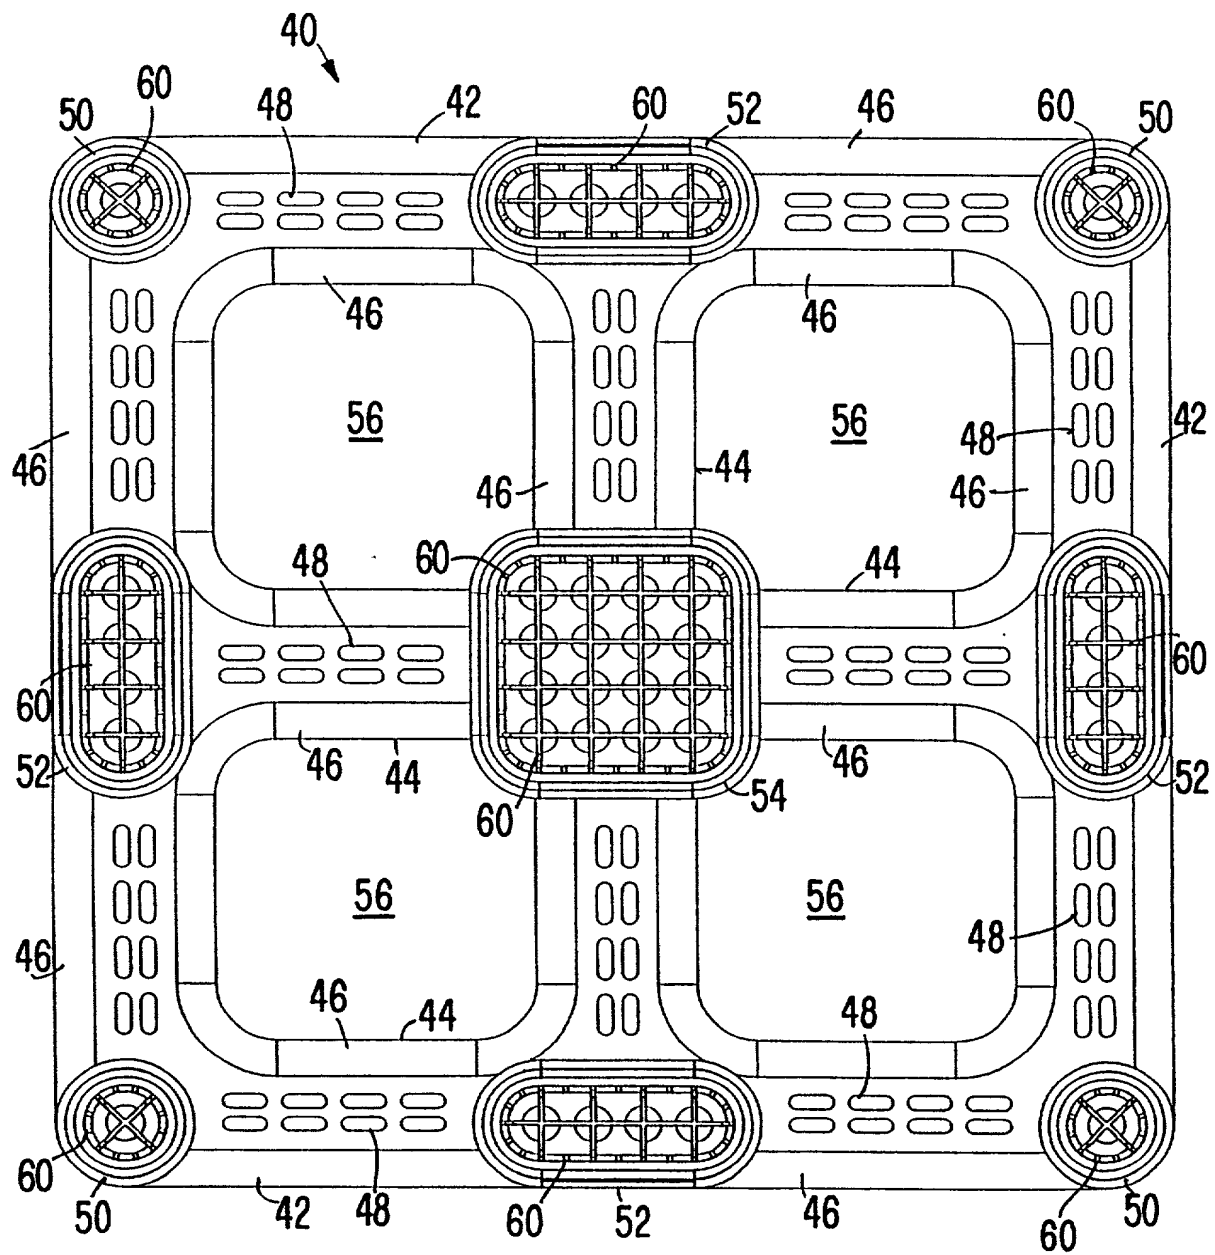


Fig. 15




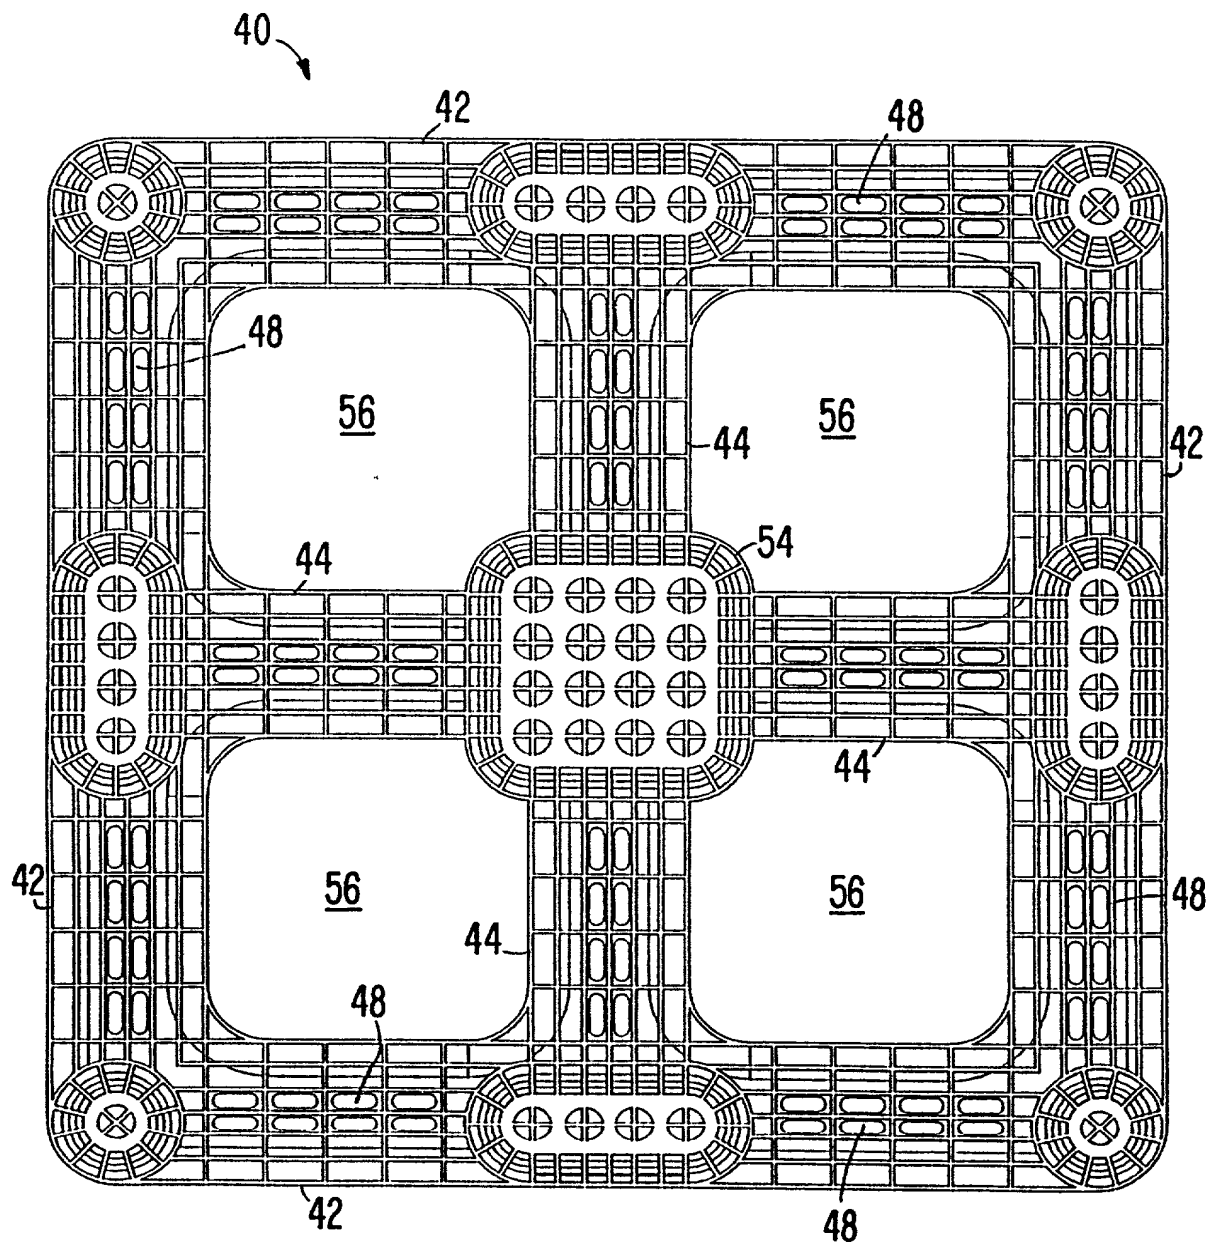


Fig. 16

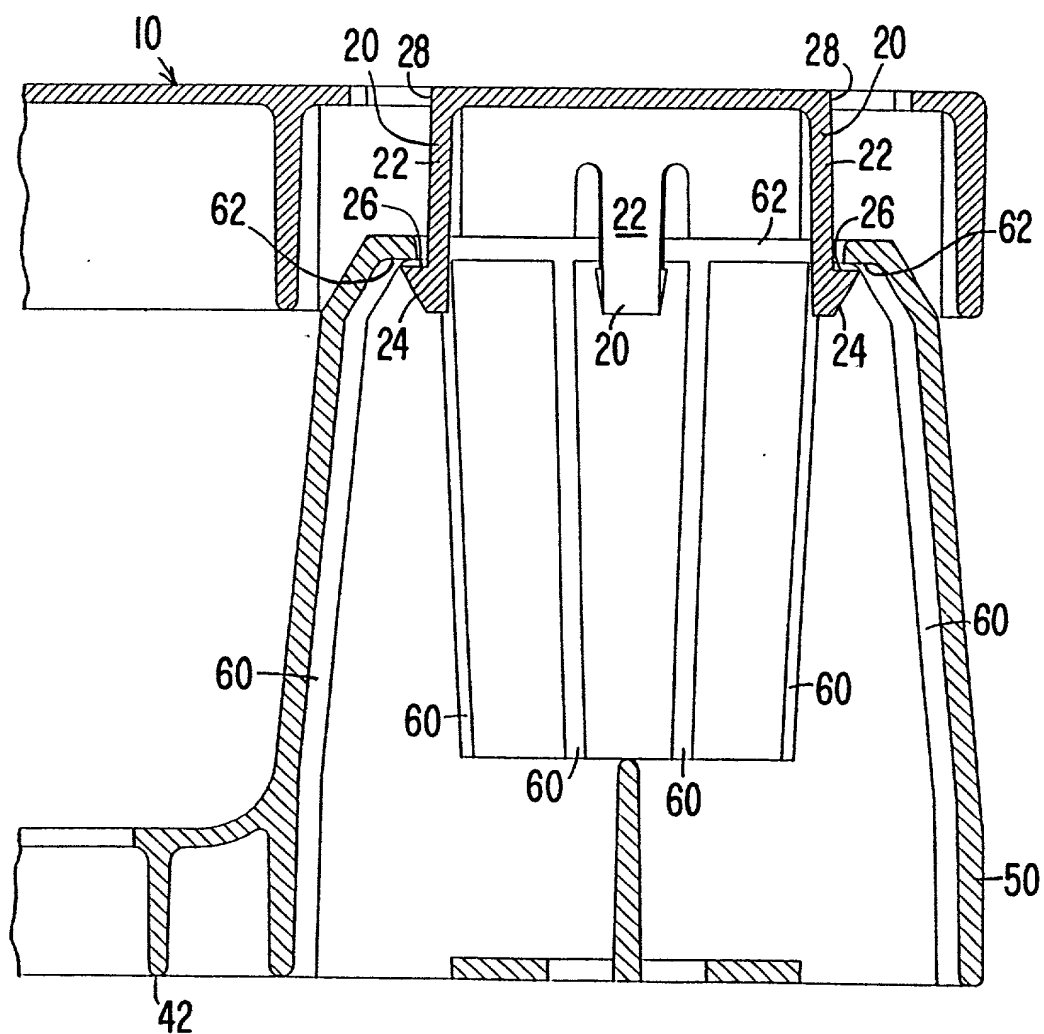

*Fig. 17*


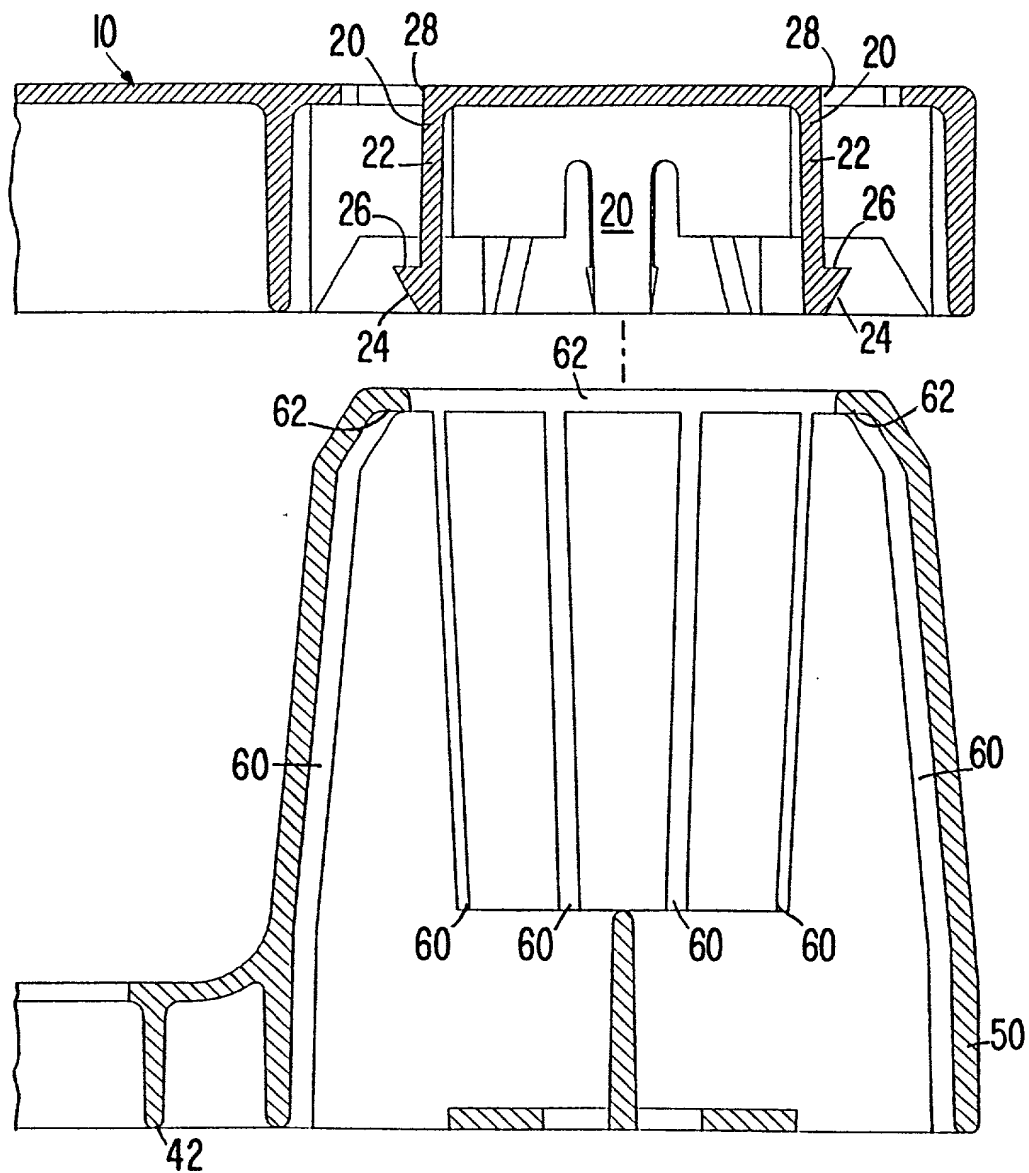


Fig. 18

**FIG. 19**

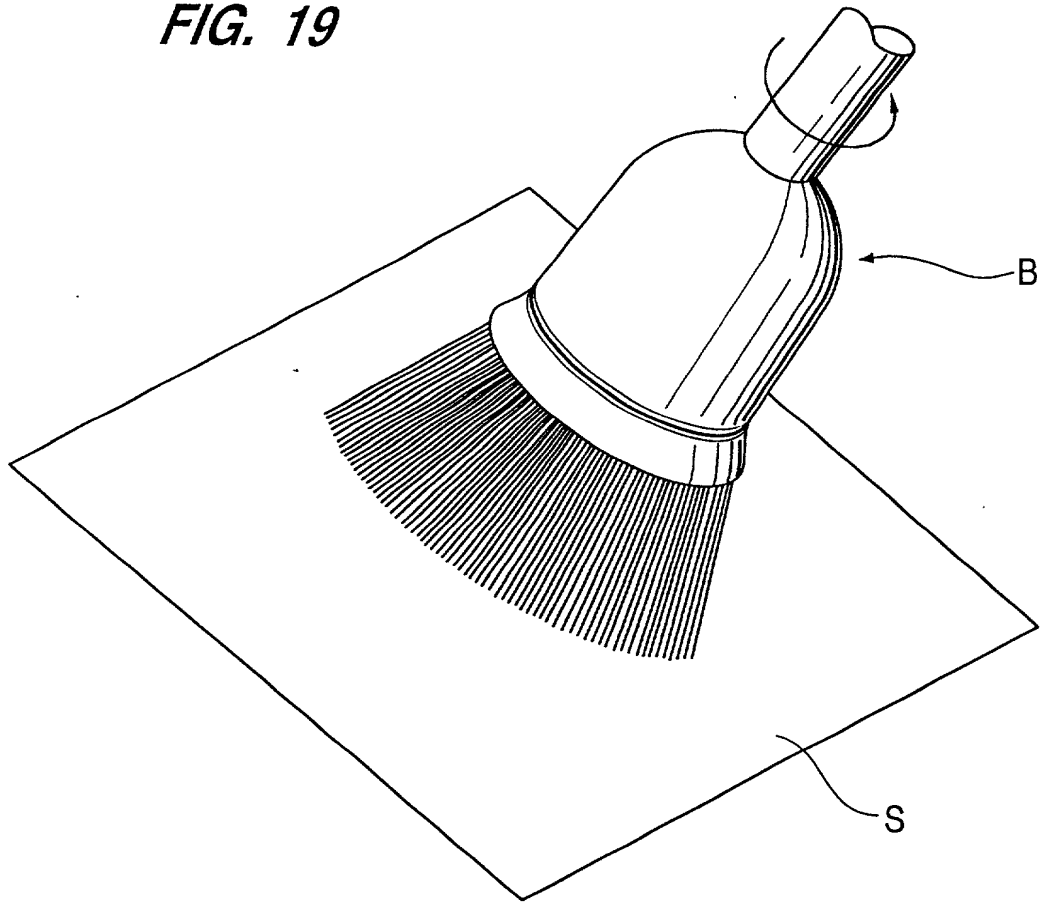

# JOINT DECLARATION FOR PATENT APPLICATION

As the below named inventors, we hereby declare that:

Our residence, post office address and citizenship are as stated below next to our names;

We believe we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled "Plastic Pallet", the specification of which

- ☐ is attached hereto.  
☒ was filed on January 8, 1998 as Application Number 09/004,389.

We hereby state that we have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

## Prior Foreign Application(s)

We hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application Number	Date of Filing (day, month, year)	Date of Issue (day, month, year)	Priority Claimed Under 35 U.S.C. § 119

## Prior United States Application(s)

We hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial Number	Date of Filing (Day, Month, Year)	Status — Patented, Pending, Abandoned

And we hereby appoint, both jointly and severally, as our attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith the following attorneys who are all members of the Bar of the District of Columbia, their registration numbers being listed after their names:

Donald W. Banner, Registration No. 17,037; Harold J. Birch, Registration No. 16,527; Edward F. McKie, Jr., Registration No. 17,335; William W. Beckett, Registration No. 18,262; Dale H. Hoscheit, Registration No. 19,090; Joseph M. Potenza, Registration No. 28,175; Alan I. Cantor, Registration No. 28,163; James A. Niegowski, Registration No. 28,331; Joseph M. Skerpon, Registration No. 29,864; Thomas L. Peterson, Registration No. 30,969; Nina L. Medlock, Registration No. 29,673; William J. Fisher, Registration No. 32,133; Thomas H. Jackson, Registration No. 29,808; and Lance G. Johnson, Registration No. 32,531.

All correspondence and telephone communications should be addressed to the Washington, D.C. office of Banner & Witcoff, Ltd., Eleventh Floor, 1001 G Street, N.W., Washington, D.C. 20001-4597, telephone number (202) 508-9100, which is also the address and telephone number of each of the above listed attorneys.

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature *William P. Gyr* Date 6-23-98 7/16/98  
 Full Name of First Inventor APPS William P  
 Family Name First Given Name Second Given Name  
 Residence 225 Lake Heights Drive, Alpharetta, GA 30022  
 Citizenship U.S.  
 Post Office Address 225 Lake Heights Drive, Alpharetta, GA 30022

Signature *Jeff Wilkerson* Date 6/19/98  
 Full Name of Second Inventor WILKERSON Jeff  
 Family Name First Given Name Second Given Name  
 Residence 4151 Woodside Knoll, Grapevine, TX 76051  
 Citizenship U.S.  
 Post Office Address 4151 Woodside Knoll, Grapevine, TX 76051

Signature *Brian Musser* Date 6-23-98  
 Full Name of Second Inventor MUSSER Brian  
 Family Name First Given Name Second Given Name  
 Residence LAUREL 76 Laure Street, Manchester, NH 03102  
 Citizenship U.S.  
 Post Office Address LAUREL 76 Laure Street, Manchester, NH 03102

LAW OFFICES  
 BANNER & WITCOFF, LTD.  
 1001 G STREET, N.W.  
 WASHINGTON, D.C. 20001-4597  
 (202) 508-9100

75 STATE STREET  
 BOSTON, MASSACHUSETTS 02109-1807  
 (617) 345-9100

TEN SOUTH WACKER DRIVE  
 CHICAGO, ILLINOIS 60606-7407  
 (312) 715-1000

60389.04283